


IXOLIFT®
LIFTING LIVES

IXOLIFT X400 INOX

STAINLESS ACCESS FOR THE HARSHEST ENVIRONMENT

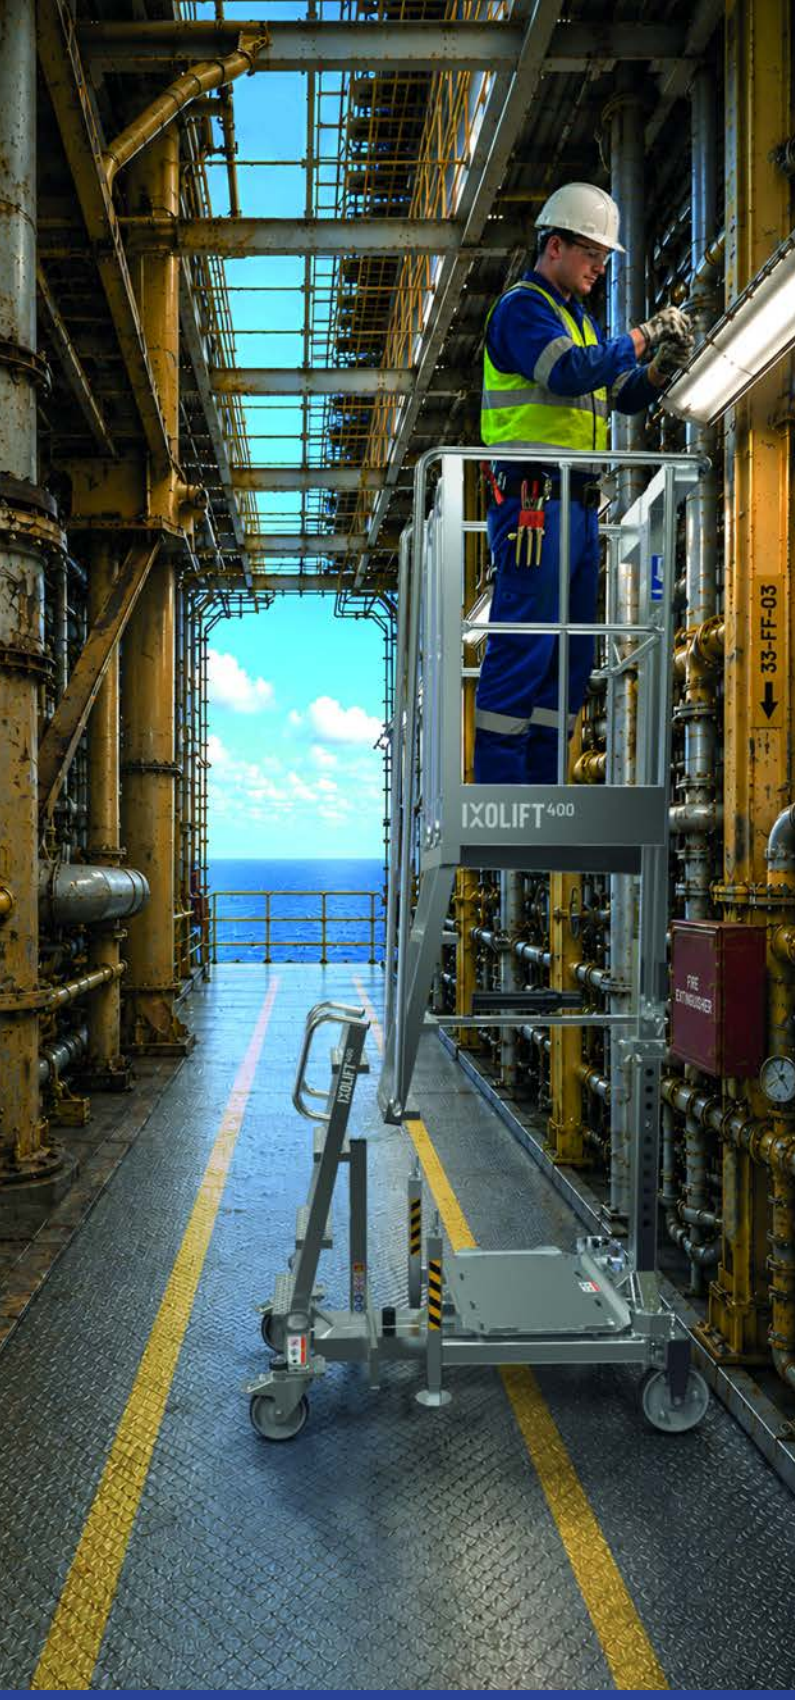

ADJUSTABLE WORK PLATFORM

SAFER ACCESS, OFFSHORE AND ONSHORE

Up to four metres of working height with both hands free – in acid-proof AISI 316 stainless steel for offshore, energy and other harsh environments.





IXOLIFT X400 INOX

ADJUSTABLE WORK PLATFORM

Familiarity should not be mistaken for safety. The **IXOLIFT X400 INOX** gives up to four metres of working height with both hands free – in acid-proof AISI 316 stainless steel that stands up to salty air, wind and the demands of offshore and onshore energy sites.

CHOOSE LADDERS LAST.
WHY BUILD A SCAFFOLD FOR A ONE-MAN JOB?

01
ADJUSTABLE HEIGHT
Stop exactly where the job is.

The raising handle locks the platform at the height you need. Patented gas spring powered height adjustment – maintenance free.

02
ALL-ROUND SAFETY
Guarded on every side, hands free.

Guardrails all round, so both hands stay on the job. Automatic anti-surfing brakes engage once the platform rises.

03
LOWER RUNNING COSTS
Quick set up, less to maintain.

Roll in, adjust height, get to work. No charging, no hydraulic oil – maintenance free. Just 728 mm wide, it goes where a scaffold won't.

04
ACID-PROOF STAINLESS
AISI 316 stainless steel.

Corrosion resistant in salty, offshore air – a long-life, low-maintenance frame for offshore and onshore energy sites.

05
ATEX CERTIFIED
Built for hazardous zones.

Every X400 INOX is ATEX-marked for Zones 1 and 21, where explosive gas or dust can occur.

06
MADE IN FINLAND
To ISO standards.

Every X400 INOX is designed and manufactured to international quality and environmental management standards (ISO 9001 and ISO 14001).



AUTOMATIC BRAKES



COMPACT SIZE



GAS SPRING POWERED



TOOL TRAY

TECHNICAL SPECIFICATIONS

IXOLIFT X400WS INOX

SPECIFICATION	X400WS INOX
Working height	**3974 mm**
Max working load	**150 kg**
Max platform height	**1974 mm**
Min platform height	**974 mm**
Platform size	**526 x 556 mm**
Stowed height	**1970 mm**
Stowed length	**1198 mm**
Stowed width	**728 mm**
Total weight	**240 kg**
Max length with stabilisers out	**1500 mm**
Max width with stabilisers out	**1668 mm**
Wind rating	**12,5 m/s**
Height adjustment	**Patented gas spring**
CE marking **Machinery Directive 2006/42/EC** **EN 280:2013 + A1:2015 except §5.6.2** **Guardrails based on EN 131-7 §5.6**	
ATEX marking **ATEX Directive 2014/34/EU** **Ex h IIC T6 Gb & Ex h IIIC T60ºC Db**	



PATENTED

BUILT FOR ENERGY SITES

12,5 m/s

WIND RATING

X400WS INOX with stabilisers out, for outdoor decks.

AISI 316

ACID-PROOF STAINLESS STEEL

Rust-resistant in salty, offshore air.

Zones 1 & 21

ATEX AS STANDARD

For areas where explosive gas or dust can occur.

X400WS INOX: max load 150 kg, working height up to 4 m | CE, ISO 9001, ISO 14001, made in Finland

WE ARE IXOLIFT®

OUR MISSION IS TO PROVIDE THE WORLD WITH A SAFE AND SMART ALTERNATIVE TO LADDERS AND SCAFFOLDS.

IXOLIFT products are designed to meet a variety of safety regulations, which allows them to be used just about anywhere. They are easy to use, maintain and manoeuvre.

Safety doesn't just come first.
Safety is IXOLIFT's mission.

IXOLIFT Ltd
Kalkkimäentie 2, FI-03100 Nummela, Finland
+358 20 741 5010 | sales@ixolift.com
www.ixolift.com

Subject to change without notice. V102.2026